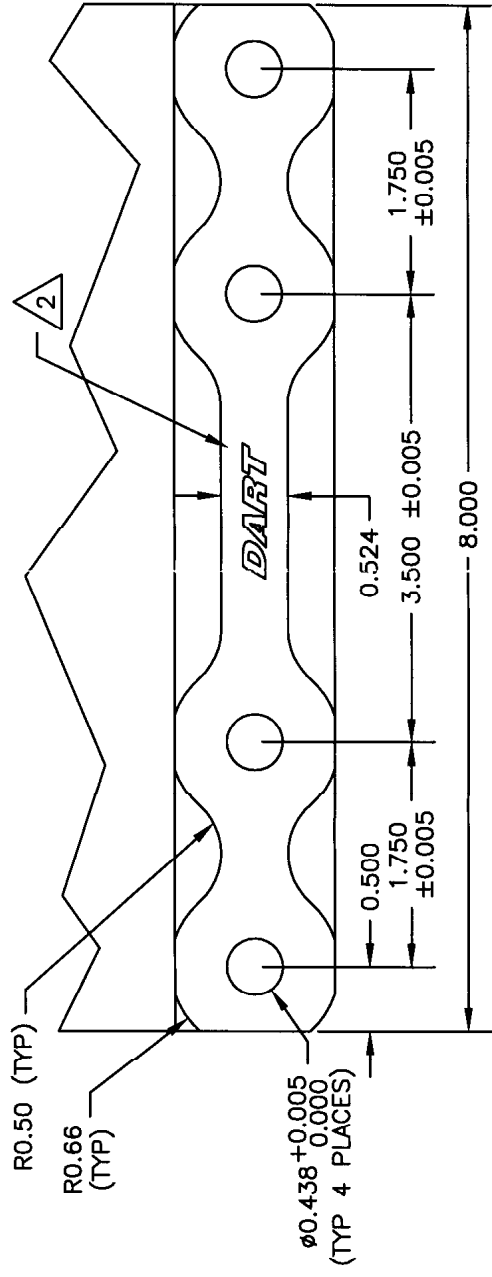


0.100 x 45° CHAMFER
(AROUND THIS SURFACE, TYPICAL)

[illegible]

D2917-1 LH SADDLE (SHOWN)
D2917-2 RH SADDLE (OPPOSITE)

MATERIAL: 6061-T6/T651 (QQ-A-250/11)
FINISH: ACID ETCH, ALODINE PER DART QSI 005 4.1
POWDER COAT WHITE (REF 4.3.5.1) PER
DART QSI 005 4.3

BREAK ALL SHARP EDGES 0.010 TO 0.020
TOLERANCES ARE PER DART QSI 018 UNLESS OTHERWISE NOTED





1

ENGRAVE DART LOGO TO MAX DEPTH OF 0.015 WITH
MIN RAD 0.125

UNDER REVIEW

07.03.07 CB
update dwg



AI	6/4	04.08.13	CHANGE RAD & TOLERANCE	
A		04.05.31	NEW ISSUE	
DESIGN		DRAWN BY		
CHECKED		APPROVED		
DATE	04.05.31	TITLE	SADDLE	
			DRAWING NO.	D2917
			REV. A	REV. A
			SHEET 1	OF 1
			SCALE	
			2:3	

COPYRIGHT © 2004 BY DART AEROSPACE LTD.

THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.

REV. A

SHEET 1 OF 1

SCALE

SADDLE

2:3